
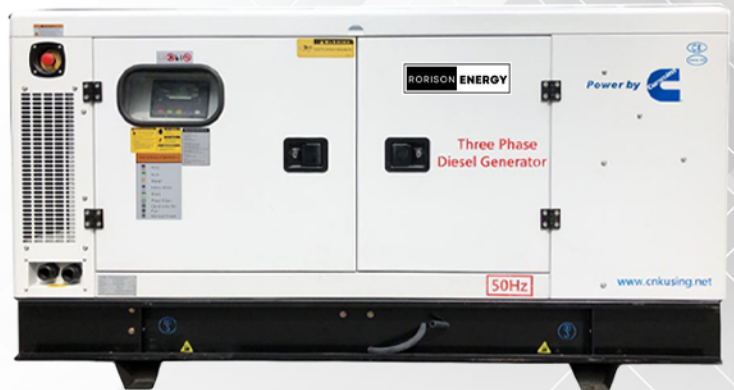


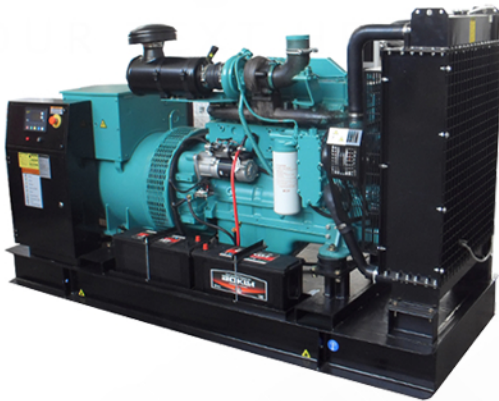

	Type	Open	Open with ATS	Silent	Silent with ATS
Generator set	Genset Model	CK30160	CK30160A	CK30160S	CK30160SA
	Prime Power Rating	20KVA/16KW			
	Standby Power Rating	22KVA/17.6KW			
	Size(mm)	1630*850*1080		2300*1100*1250	
	Weight(KG)	865		1340	
	Internal protection	IP22			
	Rate current(A)	29			
	Specific Fuel Consumption(L/H)@100% Load	2.8			
	Noise at 7 meters away(dB)	N/A		75db	
Engine	Model	CUMMINS 4B3.9-G2/4B3.9-G1			
	NO. of Cylinder	4			
	Cylinder Type	L			
	RPM	1500			
	Bore (mm)	102			
	Stroke(mm)	120			
	Speed Governor	Electronic/Mechanism			
	Start system(VDC)	24			
	Lub Oil Specification	15W40			
	Displacement(Ltrs)	3.9			
	Lub Oil Sump Capacity(Ltrs)	7.5			
	Coolant Capacity(Ltrs)	7.9			
	Air inspiration	Natural			
	Phase	3			
Alternator	Brand	KUSING			
	Model	S184G16C6			
	3 Phase Voltage(1 Phase) Volts	380-415(220-240)			
	RPM/Frequency	1500rpm/50hz			
	Power Factor(%)	0.8(lagging)			
	Voltage Tolerance(+/- %)	1			
	Insulation Class	H			
Control Panel	Brand	KUSING			
	Model	AD6122			
Fuel Tank	Capacity(Ltrs)	SUPPORT TO RUN 8-10 HOURS			