
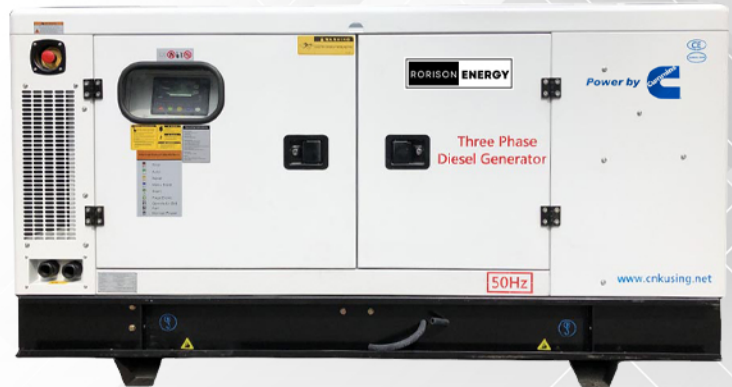


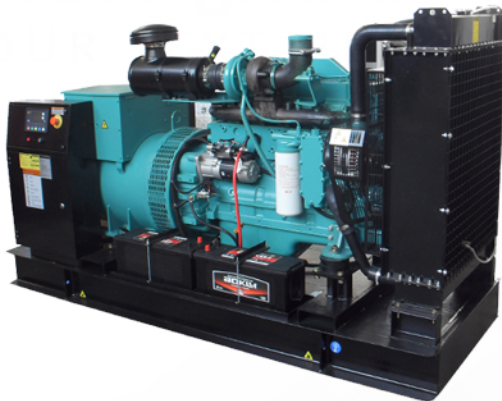

| Generator set                  | Type                                     | Open                         | Open with ATS | Silent         | Silent with ATS |
|--------------------------------|------------------------------------------|------------------------------|---------------|----------------|-----------------|
|                                | Genset Model                             | CK30200                      | CK30200A      | CK30200S       | CK30200SA       |
|                                | Prime Power Rating                       | 25KVA/20KW                   |               |                |                 |
|                                | Standby Power Rating                     | 27.5KVA/22KW                 |               |                |                 |
|                                | Size(mm)                                 | 1700*850*1080                |               | 2300*1100*1250 |                 |
|                                | Weight(KG)                               | 865                          |               | 1340           |                 |
|                                | Internal protection                      | IP22                         |               |                |                 |
|                                | Rate current(A)                          | 36                           |               |                |                 |
|                                | Specific Fuel Consumption(L/H)@100% Load | 3.5                          |               |                |                 |
|                                | Noise at 7 meters away(dB)               | N/A                          |               | 75db           |                 |
| Engine                         | Model                                    | Cummins 4B3.9-G2 / 4B3.9-G1  |               |                |                 |
|                                | NO. of Cylinder                          | 4                            |               |                |                 |
|                                | Cylinder Type                            | L                            |               |                |                 |
|                                | RPM                                      | 1500                         |               |                |                 |
|                                | Bore (mm)                                | 102                          |               |                |                 |
|                                | Stroke(mm)                               | 120                          |               |                |                 |
|                                | Speed Governor                           | Electronic/Mechanism         |               |                |                 |
|                                | Start system(VDC)                        | 24                           |               |                |                 |
|                                | Lub Oil Specification                    | 15W40                        |               |                |                 |
|                                | Displacement(Ltrs)                       | 3.9                          |               |                |                 |
|                                | Lub Oil Sump Capacity(Ltrs)              | 7.5                          |               |                |                 |
|                                | Coolant Capacity(Ltrs)                   | 7.9                          |               |                |                 |
|                                | Air inspiration                          | Natural                      |               |                |                 |
|                                | Phase                                    | 3                            |               |                |                 |
|                                | Alternator                               | Brand                        | KUSING        |                |                 |
| Model                          |                                          | S184G20D8                    |               |                |                 |
| 3 Phase Voltage(1 Phase) Volts |                                          | 380-415(220-240)             |               |                |                 |
| RPM/Frequency                  |                                          | 1500rpm/50hz                 |               |                |                 |
| Power Factor(%)                |                                          | 0.8(lagging)                 |               |                |                 |
| Voltage Tolerance(+/- %)       |                                          | 1                            |               |                |                 |
| Insulation Class               |                                          | H                            |               |                |                 |
| Control Panel                  | Brand                                    | KUSING                       |               |                |                 |
|                                | Model                                    | AD6122                       |               |                |                 |
| Fuel Tank                      | Capacity(Ltrs)                           | SUPPORT TO RUN 8 TO 10 HOURS |               |                |                 |