


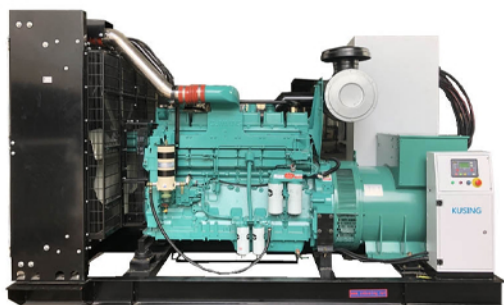

| Generator set | Type                                     | Open                         | Open with ATS | Silent          | Silent with ATS |
|---------------|------------------------------------------|------------------------------|---------------|-----------------|-----------------|
|               | Genset Model                             | CK310000                     | CK310000A     | CK310000S       | CK310000SA      |
|               | Prime Power Rating                       | 1250KVA/1000KW               |               |                 |                 |
|               | Standby Power Rating                     | 1375KVA/1100KW               |               |                 |                 |
|               | Size(mm)                                 | 5100*2030*2450               |               | 40'HQ container |                 |
|               | Weight(KG)                               | 11050                        |               | 12500           |                 |
|               | Internal protection                      | IP22                         |               |                 |                 |
|               | Rate current(A)                          | 1804                         |               |                 |                 |
|               | Specific Fuel Consumption(L/H)@100% Load | 166                          |               |                 |                 |
|               | Noise at 7 meters away(dB)               | N/A                          |               | 75db            |                 |
| Engine        | Model                                    | Cummins KTA50-G3/QSK38-G5    |               |                 |                 |
|               | NO. of Cylinder                          | 16/12                        |               |                 |                 |
|               | Cylinder Type                            | V                            |               |                 |                 |
|               | RPM                                      | 1500                         |               |                 |                 |
|               | Bore (mm)                                | 159                          |               |                 |                 |
|               | Stroke(mm)                               | 159                          |               |                 |                 |
|               | Speed Governor                           | electronic                   |               |                 |                 |
|               | Start system(VDC)                        | 24                           |               |                 |                 |
|               | Lub Oil Specification                    | 15W40                        |               |                 |                 |
|               | Displacement(Ltrs)                       | 38                           |               |                 |                 |
|               | Lub Oil Sump Capacity(Ltrs)              | 135                          |               |                 |                 |
|               | Coolant Capacity(Ltrs)                   | 1336                         |               |                 |                 |
|               | Air inspiration                          | turbo                        |               |                 |                 |
|               | Phase                                    | 3                            |               |                 |                 |
| Alternator    | Brand                                    | KUSING                       |               |                 |                 |
|               | Model                                    | S404G1000E6                  |               |                 |                 |
|               | 3 Phase Voltage(1 Phase) Volts           | 380-415(220-240)             |               |                 |                 |
|               | RPM/Frequency                            | 1500rpm/50hz                 |               |                 |                 |
|               | Power Factor(%)                          | 0.8(lagging)                 |               |                 |                 |
|               | Voltage Tolerance(+/- %)                 | 1                            |               |                 |                 |
|               | Insulation Class                         | H                            |               |                 |                 |
| Control Panel | Brand                                    | KUSING                       |               |                 |                 |
|               | Model                                    | AD6132                       |               |                 |                 |
| Fuel Tank     | Capacity(Ltrs)                           | SUPPORT TO RUN 8 TO 10 HOURS |               |                 |                 |