


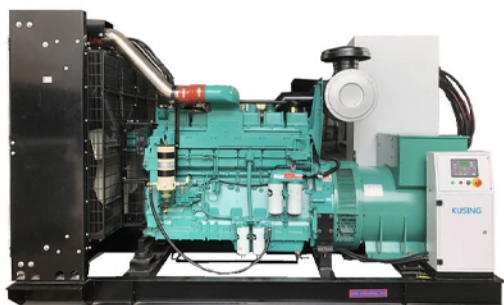

Generator set	Type	Open	Open with ATS	Silent	Silent with ATS
	Genset Model	CK311000	CK311000A	CK311000S	CK311000SA
	Prime Power Rating	1375KVA/1100KW			
	Standby Power Rating	1512.5KVA/1210KW			
	Size(mm)	5800*2030*2650		40'HQ container	
	Weight(KG)	11050		12500	
	Internal protection	IP22			
	Rate current(A)	1985			
	Specific Fuel Consumption(L/H)@100% Load	186			
	Noise at 7 meters away(dB)	N/A		75db	
Engine	Model	CUMMINS KTA50-G8			
	NO. of Cylinder	16			
	Cylinder Type	V			
	RPM	1500			
	Bore (mm)	159			
	Stroke(mm)	159			
	Speed Governor	electronic			
	Start system(VDC)	24			
	Lub Oil Specification	15W40			
	Displacement(Ltrs)	50			
	Lub Oil Sump Capacity(Ltrs)	177			
	Coolant Capacity(Ltrs)	351			
	Air inspiration	turbo			
	Phase	3			
Alternator	Brand	EVO			
	Model	TCU428F			
	3 Phase Voltage(1 Phase) Volts	380-415(220-240)			
	RPM/Frequency	1500rpm/50hz			
	Power Factor(%)	0.8(lagging)			
	Voltage Tolerance(+/- %)	1			
	Insulation Class	H			
Control Panel	Brand	KUSING			
	Model	AD6132			
Fuel Tank	Capacity(Ltrs)	1551			