


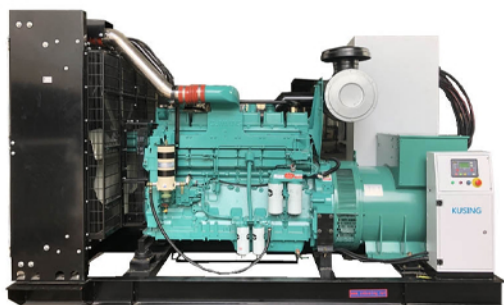

Generator set	Type	Open	Open with ATS	Silent	Silent with ATS
	Genset Model	CK316000	CK316000A	CK316000S	CK316000SA
	Prime Power Rating	2000KVA/1600KW			
	Standby Power Rating	2200KVA/1760KW			
	Size(mm)	6150*2300*2550		40'HQ container	
	Weight(KG)	13050		15500	
	Internal protection	IP22			
	Rate current(A)	2887			
	Specific Fuel Consumption(L/H)@100% Load	260			
	Noise at 7 meters away(dB)	N/A		75db	
Engine	Model	CUMMINS QSK60-G4			
	NO. of Cylinder	16			
	Cylinder Type	V			
	RPM	1500			
	Bore (mm)	159			
	Stroke(mm)	159			
	Speed Governor	electronic			
	Start system(VDC)	24			
	Lub Oil Specification	15W40			
	Displacement(Ltrs)	50			
	Lub Oil Sump Capacity(Ltrs)	177			
	Coolant Capacity(Ltrs)	351			
	Air inspiration	turbo			
	Phase	3			
Alternator	Brand	EVO			
	Model	TCU468D			
	3 Phase Voltage(1 Phase) Volts	380-415(220-240)			
	RPM/Frequency	1500rpm/50hz			
	Power Factor(%)	0.8(lagging)			
	Voltage Tolerance(+/- %)	1			
	Insulation Class	H			
Control Panel	Brand	KUSING			
	Model	AD6132			
Fuel Tank	Capacity(Ltrs)	1551			