


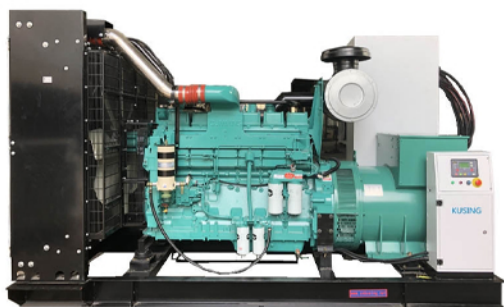

Generator set	Type	Open	Open with ATS	Silent	Silent with ATS
	Genset Model	CK318000	CK318000A	CK318000S	CK318000SA
	Prime Power Rating	2250KVA/1800KW			
	Standby Power Rating	2475KVA/1980KW			
	Size(mm)	6150*2300*2550		40'HQ container	
	Weight(KG)	20650		21780	
	Internal protection	IP22			
	Rate current(A)	3248			
	Specific Fuel Consumption(L/H)@100% Load	350			
	Noise at 7 meters away(dB)	N/A		75db	
Engine	Model	CUMMINS QSK60-G21			
	NO. of Cylinder	16			
	Cylinder Type	V			
	RPM	1500			
	Bore (mm)	159			
	Stroke(mm)	159			
	Speed Governor	electronic			
	Start system(VDC)	24			
	Lub Oil Specification	15W40			
	Displacement(Ltrs)	50			
	Lub Oil Sump Capacity(Ltrs)	204			
	Coolant Capacity(Ltrs)	351			
	Air inspiration	turbo			
	Phase	3			
Alternator	Brand	EVO			
	Model	TCU468F			
	3 Phase Voltage(1 Phase) Volts	380-415(220-240)			
	RPM/Frequency	1500rpm/50hz			
	Power Factor(%)	0.8(lagging)			
	Voltage Tolerance(+/- %)	1			
	Insulation Class	H			
Control Panel	Brand	KUSING			
	Model	AD6132			
Fuel Tank	Capacity(Ltrs)	1551			