


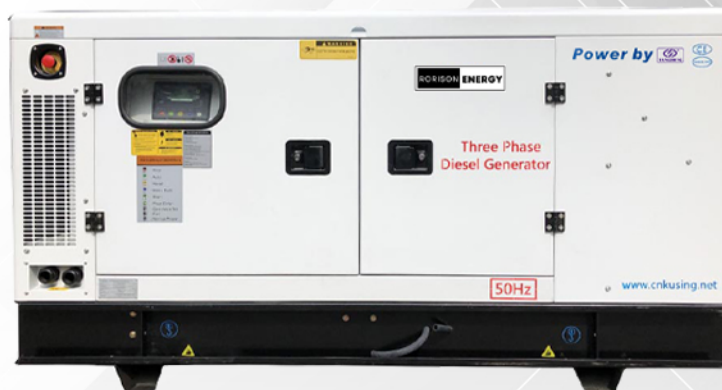

	Type	Open	Open with ATS	Silent	Silent with ATS
Generator set	Genset Model	K30160	K30160A	K30160S	K30160SA
	Prime Power Rating	20KVA/16KW			
	Standby Power Rating	22KVA/17.6KW			
	Size(mm)	1600*700*950		2250*950*1100	
	Weight(KG)	578		746	
	Internal protection	IP22			
	Rate current(A)	29			
	Specific Fuel Consumption(G/KW.H)@100 % Load	≤247.5			
	Noise at 7 meters away(dB)	N/A		75db	
	Engine	Model	CHINESE YANGDONG YSD490 / YND485		
NO. of Cylinder		4			
Cylinder Type		V			
RPM		1500			
Bore (mm)		90			
Stroke(mm)		100			
Speed Governor		electronic			
Start system(VDC)		12			
Lub Oil Specification		15W40			
Displacement(Ltrs)		2.54			
Air inspiration		Natural			
Phase		3			
Alternator		Brand	KUSING		
	Model	S184G16C6			
	3 Phase Voltage(1 Phase) Volts	380-415(220-240)			
	RPM/Frequency	1500rpm/50hz			
	Power Factor(%)	0.8(lagging)			
	Voltage Tolerance(+/- %)	1			
	Insulation Class	H			
Control Panel	Brand	KUSING			
	Model	AD6122			
Fuel Tank	Capacity(Ltrs)	SUPPORT TO RUN 8-10 HOURS			