


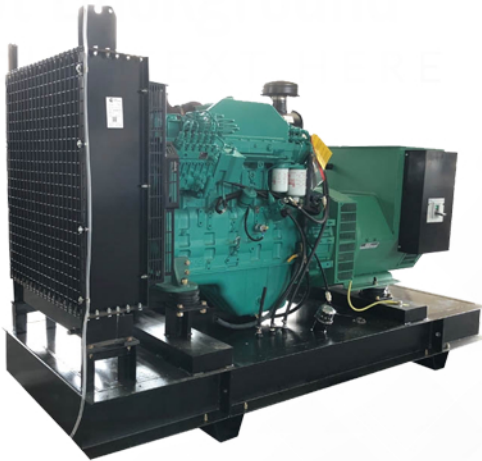

	Type	Open	Open with ATS	Silent	Silent with ATS
Generator set	Genset Model	CK30500	CK30500A	CK30500S	CK30500SA
	Prime Power Rating	62.5KVA/50KW			
	Standby Power Rating	68.8KVA/55KW			
	Size(mm)	1850*850*1280		2600*1100*1450	
	Weight(KG)	986		1585	
	Internal protection	IP22			
	Rate current(A)	90			
	Specific Fuel Consumption(L/H)@100% Load	8.9			
	Noise at 7 meters away(dB)	N/A		75db	
	Engine	Model	Cummins 4BTA3.9-G2		
NO. of Cylinder		4			
Cylinder Type		L			
RPM		1500			
Bore (mm)		102			
Stroke(mm)		120			
Speed Governor		electronic			
Start system(VDC)		24			
Lub Oil Specification		15W40			
Displacement(Ltrs)		3.9			
Lub Oil Sump Capacity(Ltrs)		10.9			
Coolant Capacity(Ltrs)		17.9			
Air inspiration		turbo			
Phase		3			
Alternator		Brand	KUSING		
	Model	S224G50C5			
	3 Phase Voltage(1 Phase) Volts	380-415(220-240)			
	RPM/Frequency	1500rpm/50hz			
	Power Factor(%)	0.8(lagging)			
	Voltage Tolerance(+/- %)	1			
	Insulation Class	H			
Control Panel	Brand	KUSING			
	Model	AD6132			
Fuel Tank	Capacity(Ltrs)	SUPPORT TO RUN 8-10 HOURS			